
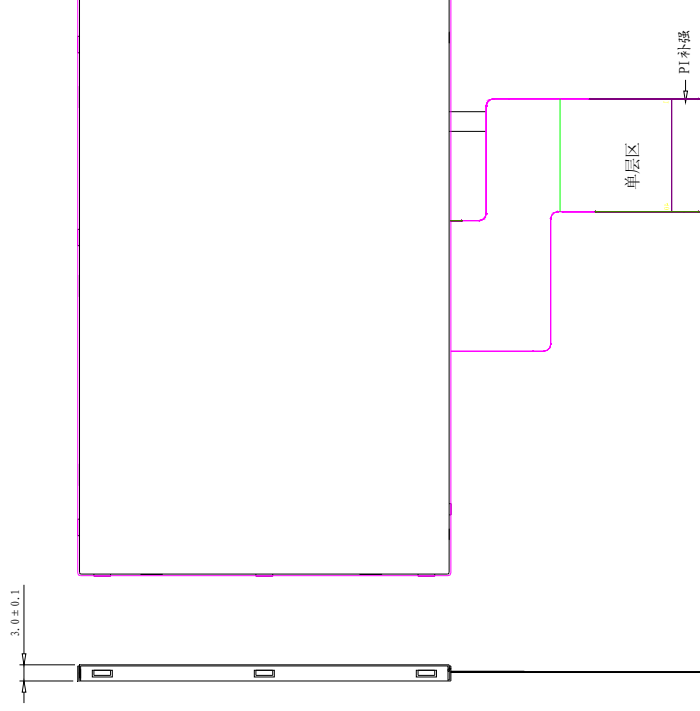


NO.	SIGNAL
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	Hsync
33	Vsync
34	DEN
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YL(NC)

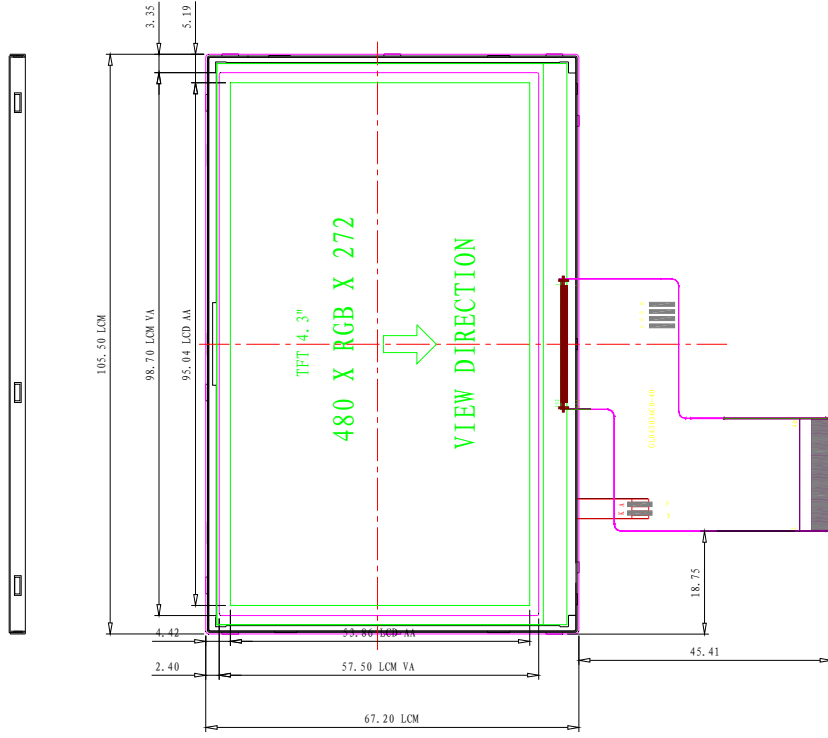

NOTE:

1. LCD TYPE : 4.3" TFT
2. DRIVER IC : 12 0'CLOCK
3. VIEWING DIRECTION : WHITE LED 7 CHIPS Parallel
4. BACKLIGHT:
5. OPERATION TEMP : -20°C~70°C
6. STORAGE TEMP : -30°C~80°C
7. GENERAL TOLERANCE: ±0.2
8. Connector : FH19-40S-05SH(51)
9. * IS IMPORTANT DIMENSION

A1 • • • • • K1
B/L CIRCUIT DIAGRAM

TOLERANCE	SCALE	N.T.S	DRG DATE	14.05.26	MODEL:	GL04305680-40
.X ±	UNITS	mm	DRG BY		TITLE:	480 (RGB) X272 DOTS
.XX ±	MATERIAL		CHK BY		DWG NO	P 1 OF 1
± 1°			APPROVED		P/N	VER: 01